

NU 150

EASY

Scotsman
Ice Systems

Self Contained Ice Machine 85 kg

Item #:
Project:
Quantity:



FEATURES

- Front-in & front-out air flow: no need to leave space on the back.
- Resistant stainless steel exterior.
- High grade appearance.
- Front access condenser air filter: a do-it-yourself cleaning operation that saves time and money and makes your ice maker live longer.
- Ergonomic access to ice with sliding disappearing door: one touch door lift makes barman's life significantly easier.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Routine Maintenance visible alarm light on front panel.
- Built-in storage bin: allows undercounter installations for easier fit-in solution, specifically for coffee shops.



NU D 150
Dice 10 g
W 22 x D 22 x H 22 mm



NU H 150
Half Dice 6 g
W 10 x D 22 x H 28 mm



NU L 150
Large Dice 15 g
W 28 x D 22 x H 28 mm

CONDENSING SYSTEM

Air cooled
Water cooled

REFRIGERANT GAS

R404A
R452A

VOLTAGE V/Hz/ph

230/50/1

INTERNAL BIN CAPACITY

20 kg

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	40
Water temperature	5	35
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10	+10

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

Download our free **App Scotsman Ice**
Apple store
Google play
Windows store



www.scotsman-ice.it
www.scotsman-ice.com

Self Contained Ice Machine 85 kg


NU 150



Self Contained Ice Machine 85 kg

Item #:
Project:
Quantity:

Self Contained Ice Machine 85 kg

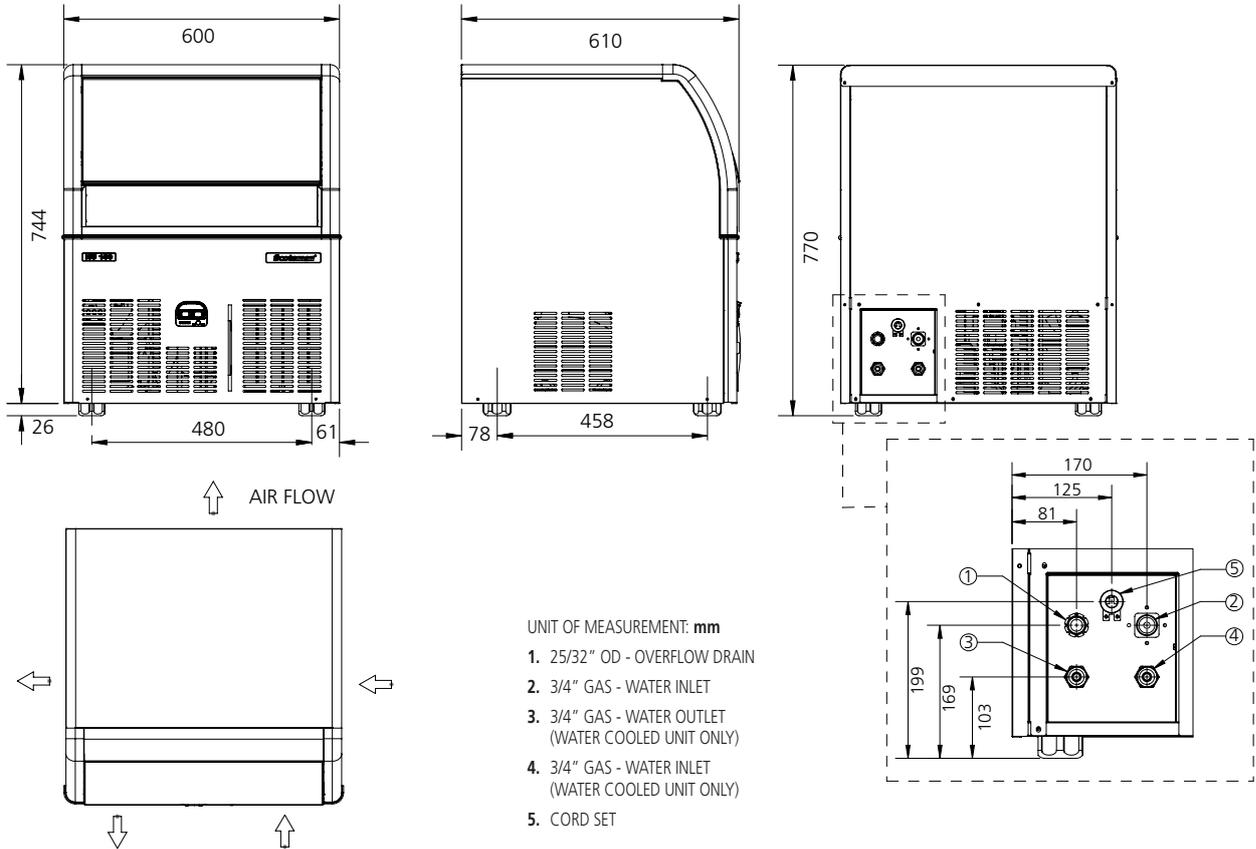

UNIT DATA		SHIPPING DATA		All data refer to R404A refrigerant models			
Size (W x D x H)	600 x 610 x 770 mm	Carton (W x D x H)	670 x 680 x 920 mm				
Net weight	50 kg	Weight	62 kg				

Version	Voltage	24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
		10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
NUD 150 AS	230/50/1	85	68	48	18.7	9.0	3.3	500	990	3 x 1.5	10
NUD 150 WS	230/50/1	85	80	70	10.8	7.6	52.7	500	990	3 x 1.5	10
NUH 150 AS	230/50/1	85	70	50	19.4	9.7	3.4	500	990	3 x 1.5	10
NUH 150 WS	230/50/1	85	70	70	10.8	7.6	52.7	500	990	3 x 1.5	10
NUL 150 AS	230/50/1	80	70	50	19.4	9.7	3.4	500	990	3 x 1.5	10
NUL 150 WS	230/50/1	80	70	65	10.8	7.0	48.9	500	990	3 x 1.5	10

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions