

NU 220

EASY

Scotsman
Ice Systems

Self Contained Ice Machine 109 kg

Item #:

Project:

Quantity:



FEATURES

- Front-in & front-out air flow: no need to leave space on the back.
- Resistant stainless steel exterior.
- High grade appearance.
- Front access condenser air filter: a do-it-yourself cleaning operation that saves time and money and makes your ice maker live longer.
- Ergonomic access to ice with sliding disappearing door: one touch door lift makes barman's life significantly easier.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Routine Maintenance visible alarm light on front panel.
- Built-in storage bin: allows undercounter installations for easier fit-in solution, specifically for coffee shops.



NU D 220
Dice 10 g
W 22 x D 22 x H 22 mm



NU H 220
Half Dice 6 g
W 10 x D 22 x H 28 mm



NU L 220
Large Dice 15 g
W 28 x D 22 x H 28 mm

CONDENSING SYSTEM

Air cooled
Water cooled

REFRIGERANT GAS

R404A
R452A

VOLTAGE V/Hz/ph

230/50/1

INTERNAL BIN CAPACITY

37 kg

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	40
Water temperature	5	35
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10	+10

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

Download our free **App Scotsman Ice**
Apple store
Google play
Windows store

DOWNLOAD

www.scotsman-ice.it
www.scotsman-ice.com

Self Contained Ice Machine 109 kg

12 April 2019

NU 220

EASY


Scotsman
Ice Systems

Self Contained Ice Machine 109 kg

Item #:

Project:

Quantity:

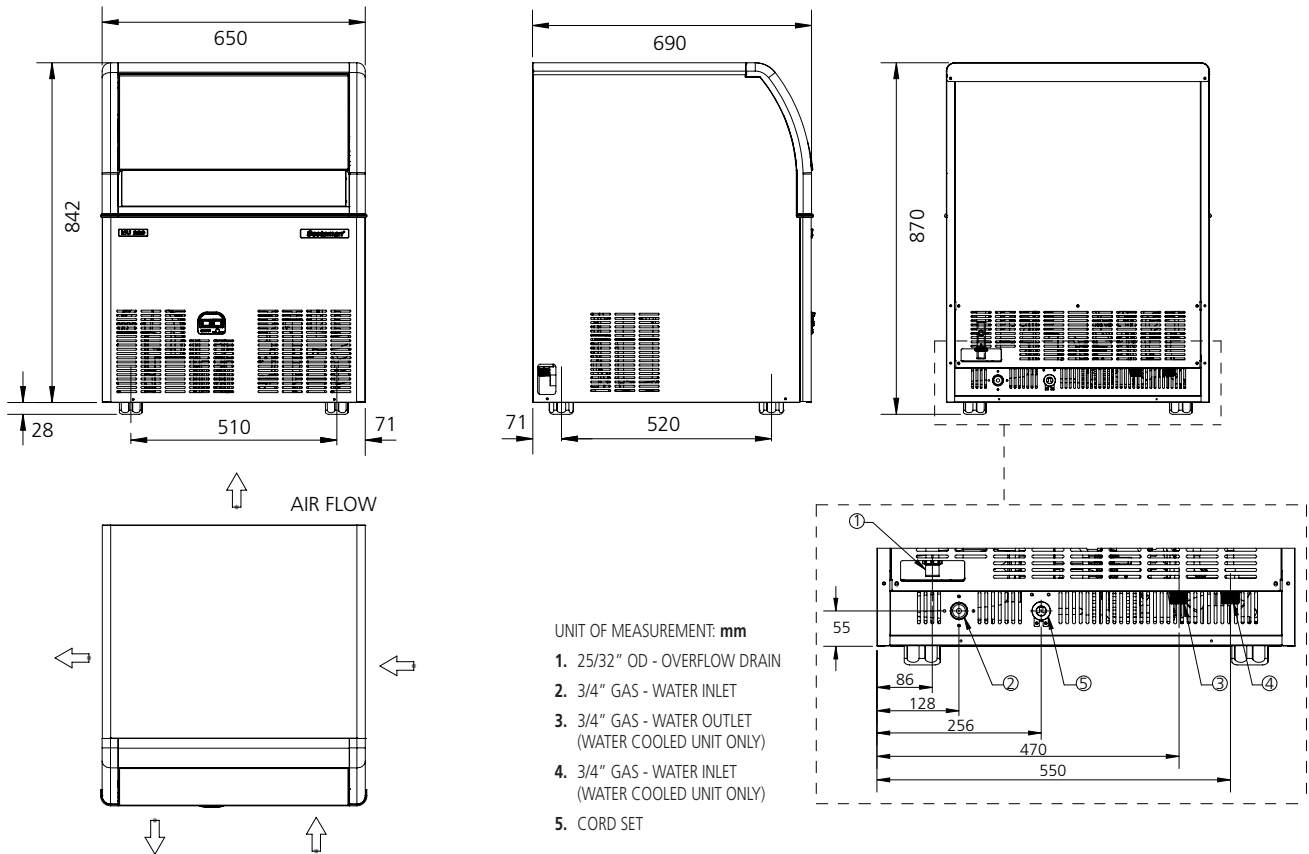

UNIT DATA					SHIPPING DATA			All data refer to R404A refrigerant models				
Size (W x D x H)		650 x 690 x 870 mm			Carton (W x D x H)		715 x 770 x 1015 mm					
Net weight		65 kg			Weight		70 kg					
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size	
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A	
		kg	kg	kg								
NUD 220 AS	230/50/1	109	100	70	19.8	13.9	4.8	600	1266	3 x 1.5	10	
NUD 220 WS	230/50/1	109	100	85	12.1	10.3	68.7	600	1266	3 x 1.5	10	
NUH 220 AS	230/50/1	104	98	65	19.8	12.9	4.5	600	1266	3 x 1.5	10	
NUH 220 WS	230/50/1	104	98	85	12.1	10.2	68.7	600	1266	3 x 1.5	10	
NUL 220 AS	230/50/1	105	95	70	19.8	13.9	4.8	600	1266	3 x 1.5	10	
NUL 220 WS	230/50/1	105	95	80	12.1	9.7	64.7	600	1266	3 x 1.5	10	

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions