

Silverlink 600 Fryers

Key Features

- Type: Gas
- Counter-top unit
- Thermostatic temperature control 110°C to 190°C
- Flame failure device
- Top temperature cut-out
- Cool zone
- Piezo ignition
- Drainage taps to front
- Nitrile rubber feet
- Supplied with baskets, batter plates and lids
- Millivolt control system (no electrical connection required)
- Finned heat exchange system



DF7

Construction

- Body: stainless steel grade 430
- Baskets: nickel plated spun wire

Available Options


- Natural gas
- Propane gas
- Butane gas
- Choice of single and twin tank models

Available Accessories

- DC01 - Doughnut fryer kit for DF4
- Various pedestals and stands

Specifications

Model	DF4	DF7
External height (mm)	425	425
External width (mm)	450	750
External depth (mm)	653	653
No. of tanks	1	2
No. of baskets	1	2
Oil capacity (litres)	8.5	2 X 8.5
Net weight unpacked (kg)	26	46
Gross weight packed (kg)	31	58
Shipping volume (m ³)	0.214	0.494
Heat input per burner Natural (kW)	11.3	8.5
Heat input per burner Propane (kW)	11.3	8.5
Heat input per burner Butane (kW)	11.3	8.5
Total heat input Natural (kW)	11.3	17.0
Total heat input Propane (kW)	11.3	17.0
Total heat input Butane (kW)	11.3	17.0
Gas consumption at full rate Natural (m ³ h ⁻¹)	1.08	1.62
Gas consumption at full rate Propane (kg h ⁻¹)	0.81	1.22
Gas consumption at full rate Butane (kg h ⁻¹)	0.82	1.24
Gas inlet	G ½ male	
Btu/h conversion	kW x 3412	

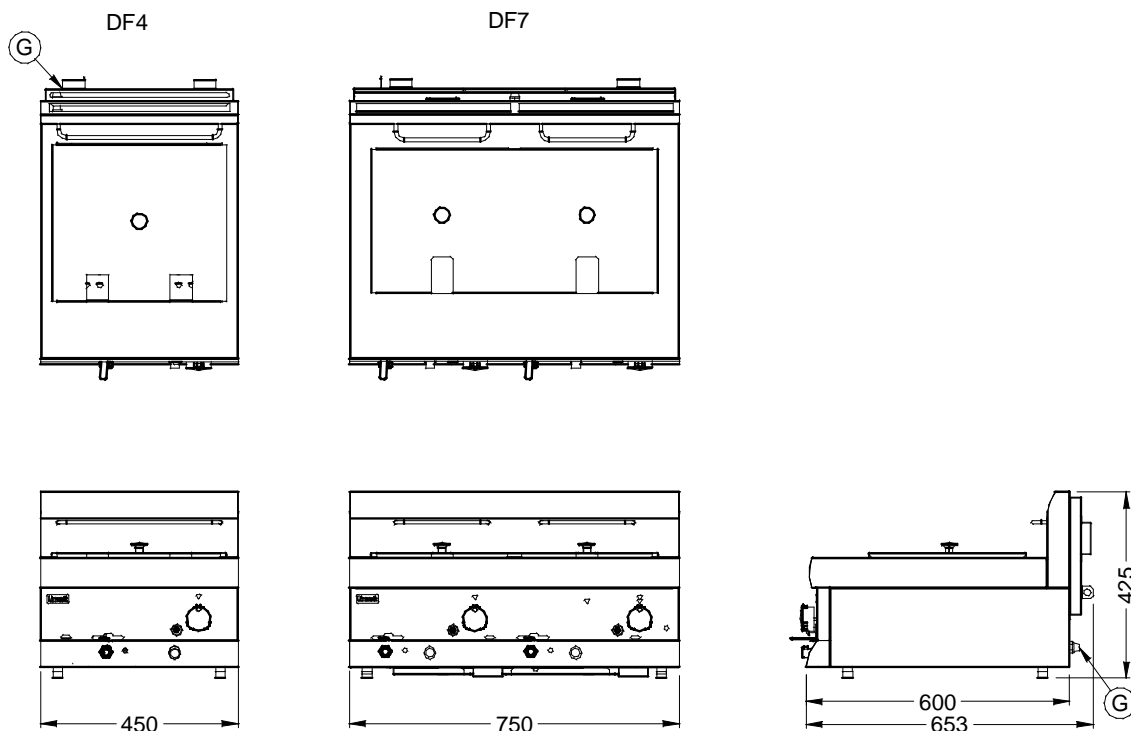

Lincat Limited, Whisby Road,
Lincoln LN6 3QZ,
United Kingdom

UK Sales Tel: 01522 875500 UK Spares Tel: 01522 875510 UK General Tel: 01522 875555
UK Fax: 01522 875530 International Sales Tel: +44 1522 503250 International Fax: +44 1522 875530
Website: www.lincat.co.uk UK Sales e-mail: sales@lincat.co.uk International Sales e-mail: export@lincat.co.uk



Document ref:
S-LINKGASFRYDF
Issue date: Oct-09