

Wash Down Hose Reels - Technical Information


- Spring loaded latch mechanisms allow complete positive hose retractions every time
- Ground edge drive springs minimise fractures found in conventional slit edge springs
- Full flow shaft and swivel ensure no water pressure drop or restriction of flow
- De-clutching arbour eliminates the possibility of spring damage due to reverse winding of the reel spool
- Hose changes are made easier on open reels as the reel does not need to be pre-tensioned
- Metal reels are either steel powder coated or stainless steel for maximum working life
- Any model can be mounted on the wall or ceiling

NB: Installation must comply with local water authority codes. Isolation controls and check valves not included. Hose reels are not WRAS listed. Min. 3 bar pressure required to provide reasonable washing performance.




MRK15 Series NB: 3-20bar (300psi)
STANDARD, POWDER-COATED STEEL FINISH, open-reel.
 Hose length: 15 mt (50ft)
 Hose inside Dia.: 12mm (1/2-in)
 Inlet: 1/2 inch bsp, female connection
 Overall Weight: 24kg
 Optional Wall Mounted Pivot Bracket: model MRK-WMPB

M SRK15 Series NB: 3-20bar (300psi)
STAINLESS STEEL FINISH, open-reel.
 Hose length: 15 mt (50ft)
 Hose inside Dia.: 12mm (1/2-in)
 Inlet: 1/2 inch bsp, female connection
 Overall Weight: 23kg
 Optional Wall Mounted Pivot Bracket: model MSRK-WMPB

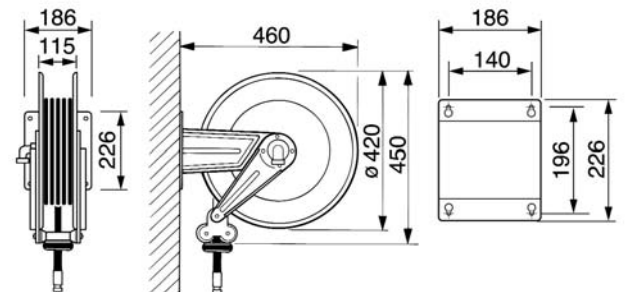

MERK15 Series NB: 3-17bar (250psi)
POLYPROPYLENE UPVC FINISH, enclosed-reel.
 Hose length: 15 mt (50ft)
 Hose inside Dia.: 12mm (1/2-in)
 Inlet: 1/2 inch bsp, female connection
 Overall Weight: 12kg

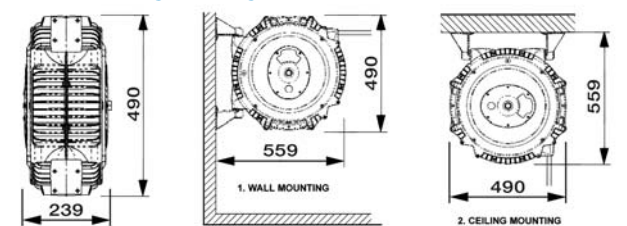

= Enjoy significant water savings

Dimensions shown in mm unless otherwise stated. Information and numerical data has been prepared as a general guide to the products but intending buyers & users must satisfy themselves as to the suitability and safety of the products for their particular purposes & duties. No responsibilities are assumed for errors herein. The company reserves the right to alter designs and specifications of the products without notice. NB: Product accreditation may not apply to all products in the relevant range. Please contact Mechline to confirm.