

Technical data sheet for

GAS TILTING BRATT PAN 900mm

G580-8, G580-8E

- 80L full stainless steel pan
- Manually operated tilting mechanism
- Optional electric power tilting mechanism
- Heavy-duty lid and hinge system
- Galvanized steel chassis
- Stainless steel exterior
- Easy clean
- Easy service
- Fully modular



G580-8

Overall Construction

- Heavy-duty galvanized steel chassis
- Side panels 1.2mm stainless steel
- Splashback 1.2mm stainless steel
- Front panels 0.9mm stainless steel
- Enamelled pan front cover
- Full stainless steel pan with 2.0mm pan body
- 12mm thick stainless steel even heat pan base
- Large capacity pouring spout
- Heavy-duty spring balanced lid hinge system
- 1.5mm stainless steel lid suitable as bench-top workspace
- Full width stainless steel lid handle
- Manually operated pan lift handwheel with fold-away handle
- Electrically powered pan tilting option
- 63mm dia. heavy-duty stainless steel legs with adjustable feet

Controls

- Large easy use control knobs - heat resistant reinforced
- Easy view control settings on knobs
- Single control for power and heating control
- Indicator lights for power and heating
- Quarter turn water valve control for ease of use
- Automatic pilot ignition and flame failure fitted
- 50-320°C electric thermostatic burner control
- Over temperature safety cut-out
- Fold away handle on manual pan tilt
- Pan up and down switches on electric pan tilt

Cleaning and Servicing

- Seamless full stainless steel pan with rounded corners
- Easy clean stainless steel exterior panels
- Easy connection access via front service panels
- Service friendly lid hinge system
- Access to all parts from front of unit

Technical data sheet for GAS TILTING BRATT PAN 900mm

Specifications

Burner
Single 6 bar stainless steel burner 20kW

Gas power (gross)
20kW, 68,600 Btu/hr

Pan
Cooking surface 780mm x 450mm, 3510cm²
215mm deep

Gas connection
R 3/4 (BSP) male
All units supplied with Natural and LP gas
regulator

Water connection
Cold water connection
1/2" tube connection via 15mm crox fitting
550kPa, 80psi max water pressure

Electrical connection
220-240Vac, 50/60Hz, 1A, 1P+N+E
3 pin 13A plug cordset fitted

Dimensions
Width 900mm
Depth 812mm
Height 915mm
Incl. splashback 1085mm
With lid open 1566mm


Nett weight
170kg

Packing data
1.03m³
Width 945mm
Depth 870mm
Height 1255mm


Gas types
Available in Natural gas and LP gas, please specify
when ordering
Units supplied complete with gas type
conversion kits

Options
Joining caps



G580-8



G580-8E



G580-8, G580-8E

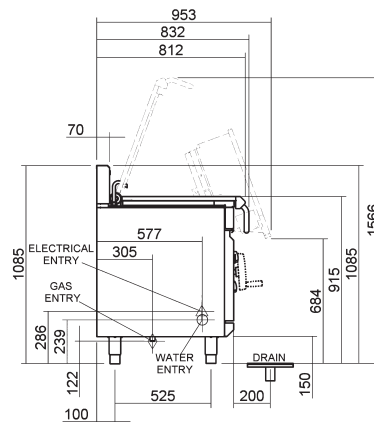

BLUE SEAL
www.blue-seal.co.uk
www.bluesealevolution.com

United Kingdom
Blue Seal Limited
Unit 67
Gravelly Business Park
Gravelly
Birmingham B24 8TQ
England
Telephone 0121-327 5575
Facsimile 0121-327 9711
Email sales@blue-seal.co.uk
www.blue-seal.co.uk

Australia
Moffat Pty Limited
740 Springvale Rd
Mulgrave
Victoria 3170
Australia
Telephone 03-9518 3888
Facsimile 03-9518 3833
Email vsales@moffat.com.au
www.moffat.com.au

New Zealand
Moffat Limited
16 Osborne St
PO Box 10-001
Christchurch 8011
New Zealand
Telephone 03-389 1007
Facsimile 03-389 1276
Email sales@moffat.co.nz
www.moffat.co.nz

ISO 9001
Quality
Management
Standard

Designed and manufactured by

MOFFAT

ISO9001
All Blue Seal products are designed
and manufactured by Moffat using
the internationally recognised
ISO9001 quality management
system, covering design,
manufacture and final inspection,
ensuring consistent high quality
at all times.

CE

In line with policy to continually
develop and improve its products,
Moffat Limited reserves the right to
change specifications and design
without notice.