



Product Code: EP1/3H

EcoPro G2 Refrigerated Counter with Drawers (door/drawer combination: D-D-2)



Features & Benefits

- High Quality 304 Stainless Steel Exterior Build Quality
- ECA Scheme Approved - as ECA products are guaranteed to be energy efficient, money can be claimed back on your investment
- Smartphone style' touch sensitive hidden until lit control pannel
- Fully floating lock provides durable security and prevents lock breakage if the key is left in
- Energy-saving Hydrocarbon refrigerant option at no extra cost
- High performance cyclopentane foam
- Airlines' ventilation system reduces compressor running time by 15%
- Take the travel out of food preparation
- drawers will accommodate GN1/1 pans to a max depth of 150mm
- Reduce width option available on request

Shelving

Additional S/S Trayslides	Option
Additional GN1/1 Shelf	Option

Refrigeration

R290 - Energy Efficient	Standard
R134a - Industry Standard	Option
Integral Refrigeration System	Standard
Less Condensing Unit	Option
RH Mounted Ref Unit	Option

Specification

Refrigerator +1/+4°C	Standard
Width (mm)	1865
Depth (mm)	700
Height (mm)	865
Gross Volume (Ltr)	435

Base Fittings

Remote Refrigeration System	Option
Castors 80mm	Standard
100mm legs in lieu of castors	Option
Legs 150mm	Option

Electrical & Service Data

Connect Load	310
230/50/1	Standard
Fuse Required (A)	10
Refrigerant Charge (kg)	0.150

Finish

304 s/s ext & alu int	Standard
304 s/s	Option
304 S/S back for island sitting	Option
Worktop	Standard

Doors

Solid Door / Solid Door / Half Drawer	Standard
Half Drawer / Half Drawer / Half Drawer	Standard
Solid Door / Solid Door / Third Drawer	Option
Solid Door / Third Drawer / Third Drawer	Option
Third Drawer / Third Drawer / Third Drawer	Option
Solid Door / Half Drawer / Half Drawer	Option

Product Extras

Helicoil Mains Lead	Option
Less Worktop	Option

Energy

kWh (24 hours)	1.34
AEC	488.455118
Nett Volume	228.68456
Energy Grade	A
Global Warming Potential	3
Energy Efficiency Index	20.57


Footnotes

- Castors not available if product supplied less condensing unit
- 100mm leg option: height ranges from 835 to 865mm (replacement for standard castors). 150mm legs: height ranges from 885 to 935mm
- Depth with door open is 1113mm
- Decibel rating measured 1m high from the floor and 1m out from the counter
- 60Hz model supplied as 220v machine with separate transformer for conversion to 115v supply.
- Adequate airflow must be kept around the counter: 150mm
- Any mix of two or three drawer units is possible, as is any combination of drawers and doors. Important - drawer sections are supplied without shelves. Will accommodate pans (optional extra): 1/2 drawers up to 150mm, 1/3 drawers up to 100mm (top drawer max. 70mm on 1/3 drawers)

Energy Performance Data and information



Foster Refrigerator - a division of ITW Ltd
Oldmedow Road, KING'S LYNN, Norfolk PE30 4JU
Tel: 0843 216 8800 Fax: 0843 216 4700
Registered in England No. 00559693
VAT No. GB 792 4414 16

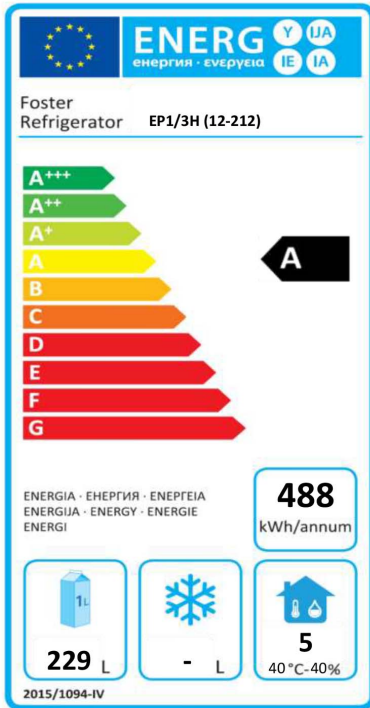

Master data version: Ver.01.0014A8

Generated: 31/05/2019

Application

This appliance is intended for use in ambient temperatures up to {1}°C

Safety

Precautionary instructions and maintenance advice, to ensure efficient operation, can be found in this products operating instructions.

Recycling

For recycling and end of life care for this product, please refer to environmental section of the website or visit [our policies](#)



Energy



Quality



Value



Design



Hygiene



After Care

Foster Refrigerator, Oldmedow Road, King's Lynn, Norfolk, PE30 4JU
Phone 08432 168800 | Email sales@foster-uk.com | Visit www.fosterrefrigerator.com

All images shown are for illustration purpose only. All images and photographs are not intended to be relied upon for, nor to form part of, any contract unless specifically incorporated in writing into the contract. Solely the dimensions and specifications incorporated in the quotation or purchase order confirmation shall be contractually binding.