


Thermowell Range


Model: TW9, TW15 & TW18 - Datasheet



TW18

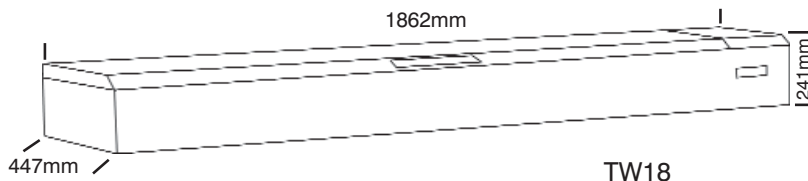

TW18

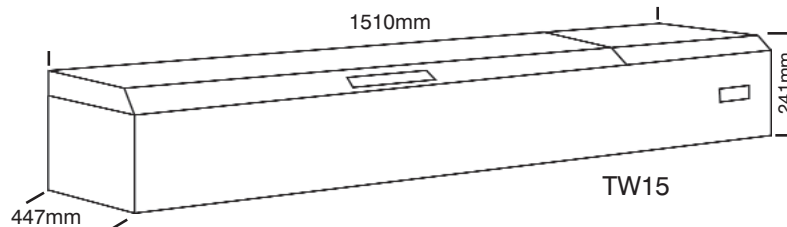

TW15



TW15



TW9

Key Features

- Foodsafe stainless steel exterior and interior
- Designed to accommodate 4, 7 or 9 x 1/3 pans depending on model
- Digital thermometer and adjustable thermostat
- Designed and engineered to operate efficiently up to a 43°C ambient, this exceeds Climate Class 5
- Hinged lid designed to stay open for easy access and ease of cleaning
- Precision injected, high density polyurethane insulation. Provides excellent thermal efficiency with low GWP (Global Warming Potential) and zero ODP (Ozone Depletion Potential)
- Fitted with rubber feet offering non-slip placement
- Removable unit cover for easy access for servicing and maintenance

- Accepts 100mm deep 1/6GN and 1/3GN pans

Variant	Temp	Storage
TW9	+4/+8°C	General Produce
TW15	+4/+8°C	General Produce
TW18	+4/+8°C	General Produce

Options

- Wall mounting kit
- Counter mounting kit
- Free standing extended legs (350mm incl. feet)
- Bridging bars
- 1/6 Stainless steel gastronorm pans
- 1/3 Stainless steel gastronorm pans

Dimensions

	TW9	TW15	TW18
External (mm):			
Lid Open:	H241 H563 W980 D385 D447	H241 H563 W1510 D385 D447	H241 H563 W1862 D385 D447
Internal well (mm):	H105 W687 D305	H105 W1217 D305	H105 W1569 D305
Packed:	H340 W1080 D475	H340 W1610 D475	H340 W1960 D475
Weight: Add 5kg per product for packaging	29kg	37kg	44kg

Important Information

	TW9	TW15	TW18
Capacity: 1/3 GN containers (not included)	4	7	9
Construction			
Exterior	0.7mm stainless steel	0.7mm stainless steel	0.7mm stainless steel
Interior	0.6mm stainless steel	0.6mm stainless steel	0.6mm stainless steel
Hinged Lid	0.9mm stainless steel	0.9mm stainless steel	0.9mm stainless steel
Power Supply	220V/240V 50Hz/1Ph 13 amp plug	220V/240V 50Hz/1Ph 13 amp plug	220V/240V 50Hz/1Ph 13 amp plug
Power Input			
Start Up	8.35 amps	8.35 amps	8.35 amps
Running	1.25 amps	1.25 amps	1.25 amps
Compressor HP	1/6	1/6	1/6
Energy Consumption (Tested to EN153) in 24hrs	1.36kW	1.53kW	1.8kW
Heat Rejection (Evaporating at -10°C in 32°C ambient)	267 watts	267 watts	267 watts
Refrigerant	R134a	R134a	R134a
Refrigeration	Static piped liner on manual thermostat	Static piped liner on manual thermostat	Static piped liner on manual thermostat
Insulation ODP Zero Polyurethane	35mm	35mm	35mm
Noise Output	40.0dBA	42.0dBA	42.0dBA
Fittings			
GN Pans	Can accept 1/3; 1/6GN pans Not included	Can accept 1/3; 1/6GN pans Not included	Can accept 1/3; 1/6GN pans Not included



Bryggen Road, North Lynn Industrial Estate
King's Lynn, Norfolk PE30 2HZ

T +44 (0) 1553 817000

F +44 (0) 1553 817111

Spares +44 (0)1553 817017

E info@williams-refrigeration.co.uk

W www.williams-refrigeration.com

All refrigeration equipment requires adequate ventilation for efficient and effective performance. Williams are committed to a policy continuing product development and innovation and as such, we reserve the right to change product specifications stated without prior notice.